


Screw Extraction Set.

Option Flow Chart for Screw Extraction.

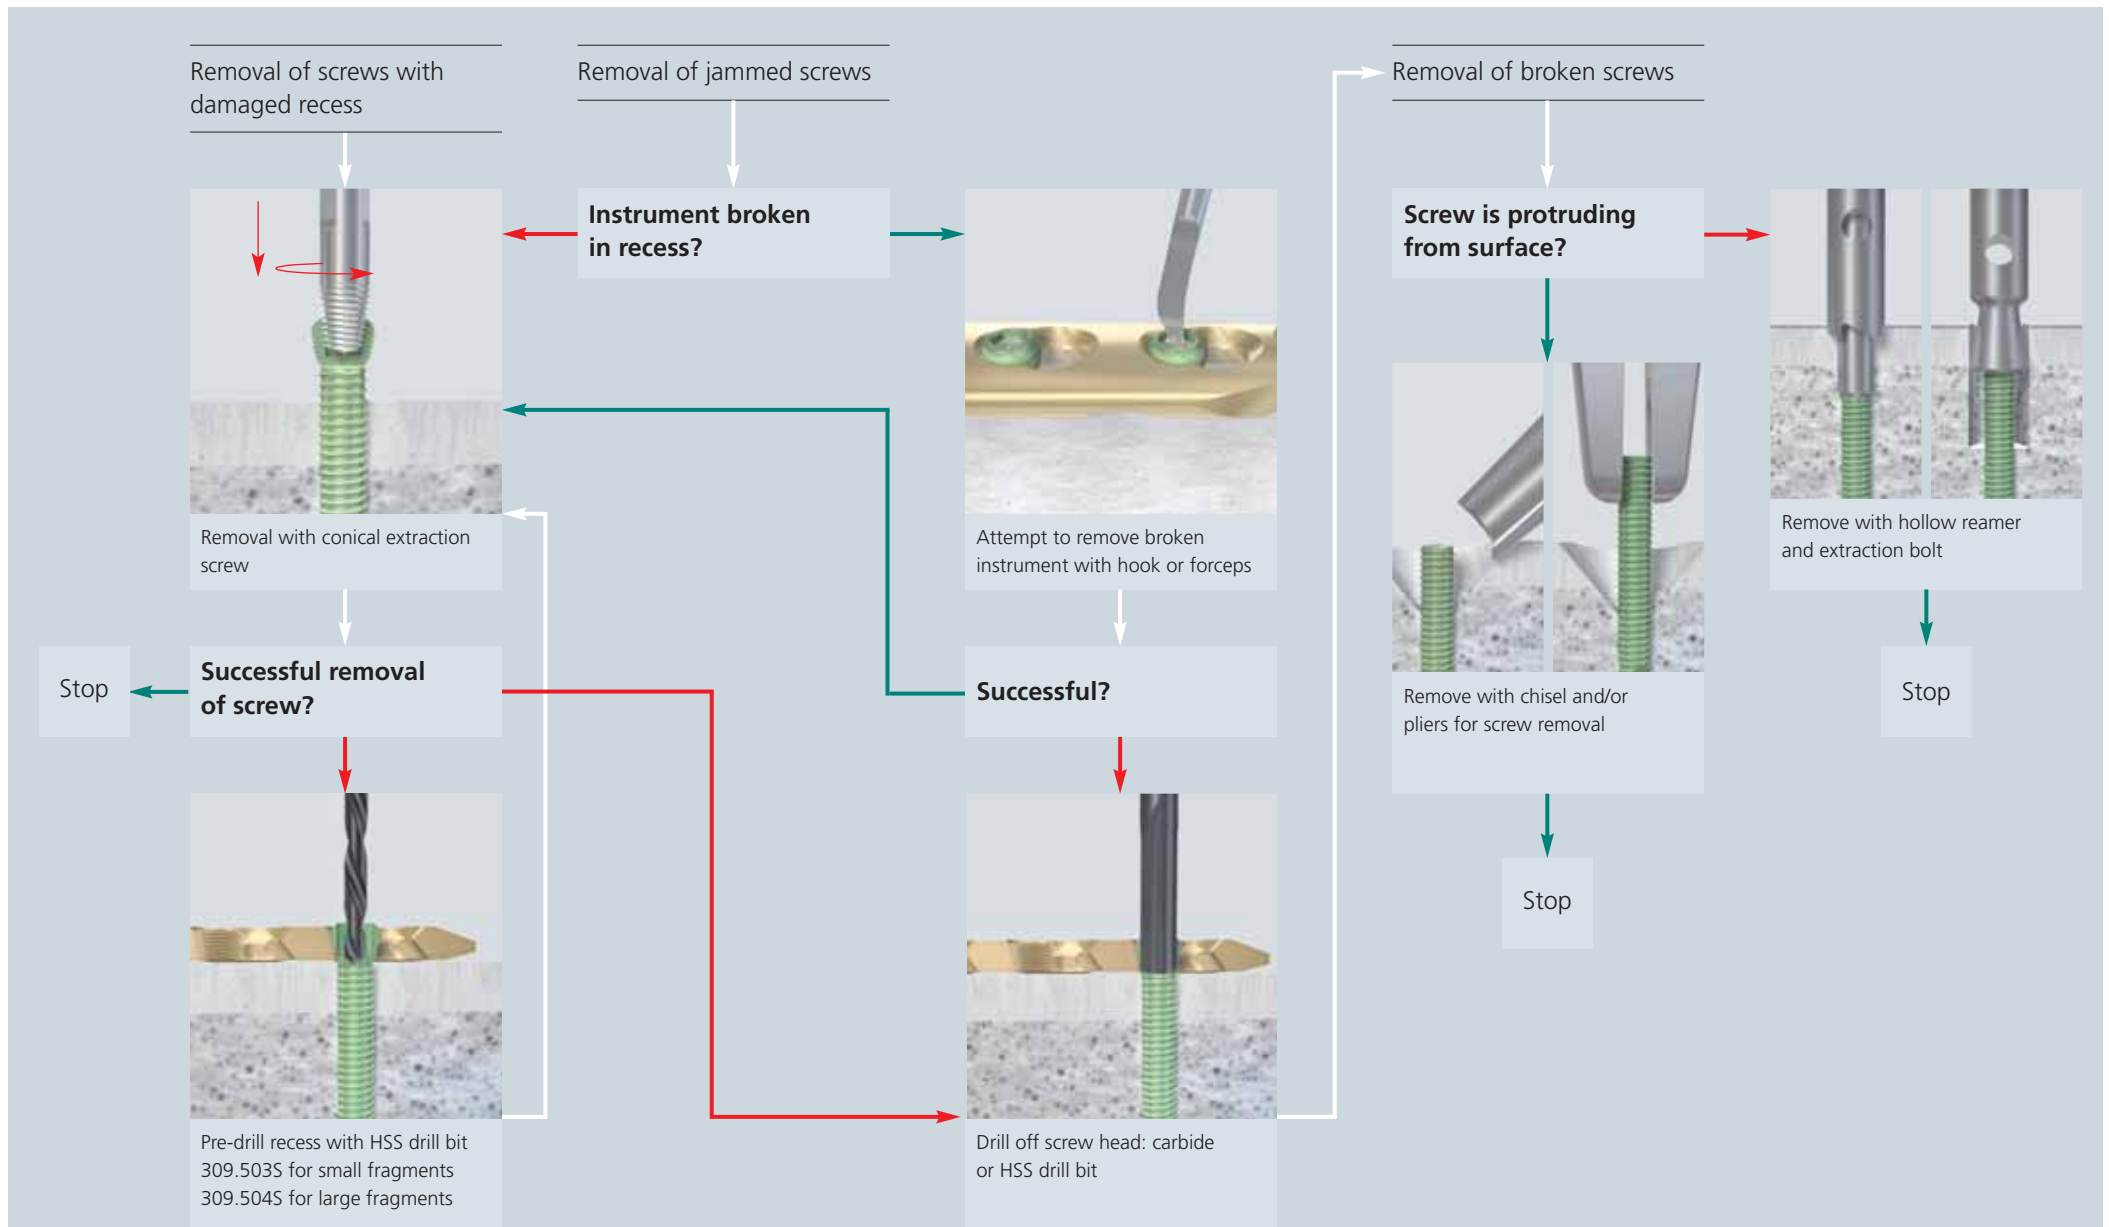


→ No
→ Yes

Screw Extraction Set.

Option Flow Chart for Screw Extraction.

Assembly of hollow reamer

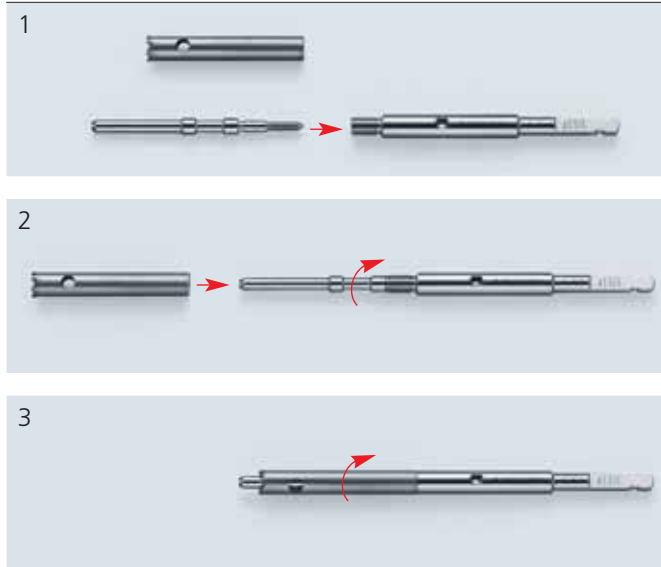

Drill bits for metal: recommended applications

Carbide Drill Bit

- Titanium
- Instrument steel



HSS Drill Bit

- Implant steel



Removal of broken screws

Hollow reamer and extraction bolt/screw diameter

Ø		1.0/1.3/1.5 mm (Cruci.)	1.5 mm (1.5 Hex)	2 mm (Cruci.)	2 mm (1.5 Hex)	2 mm (T6)	2.4 mm (Cruci.)	2.4 mm (T8)	2.7 mm (2.5 Hex)	2.7 mm (T8)	2.7 mm (T15)	3.4 mm (3.5 Hex)	3.5 mm (2.5 Hex)	3.5 mm (T15)	3.9 mm (2.5 Hex)	3.9 mm (3.5 Hex)	4.0 mm (2.5 Hex)	4.0 mm (3.5 Hex)	4.0 mm (T25)	4.5 mm (3.5 Hex)	4.9 mm (3.5 Hex)	5.0 mm (3.5 Hex)	5.0 mm (T25)	6.0 mm (T25)	6.5 mm (3.5 Hex)	
	309.150	•	•	•	•	•																				
	309.200			•	•	•																				
	309.250						•	•	•	•	•															
	309.035											•	•	•	•	•	•	•	•							
	309.450																•	•	•	•	•	•	•			
	309.065																							•	•	
	309.090	•	•																							
	309.190			•	•	•																				
	309.290						•	•	•	•	•															
	309.039											•	•	•	•	•	•	•	•							
	309.490																•	•	•	•	•	•	•			
	309.069																							•	•	

Removal of screws with damaged screw recess

Conical extraction screw/diameter

Ø		1.0/1.3/1.5 mm (Cruci.)	1.5 mm (1.5 Hex)	2.0 mm (Cruci.)	2.0 mm (1.5 Hex)	2.0 mm (T6)	2.4 mm (Cruci.)	2.4 mm (T8)	2.7 mm (2.5 Hex)	2.7 mm (T8)	2.7 mm (T15)	3.4 mm (3.5 Hex)	3.5 mm (2.5 Hex)	3.5 mm (T15)	3.9 mm (2.5 Hex)	3.9 mm (3.5 Hex)	4.0 mm (2.5 Hex)	4.0 mm (3.5 Hex)	4.0 mm (T25)	4.5 mm (3.5 Hex)	4.9 mm (3.5 Hex)	5.0 mm (3.5 Hex)	5.0 mm (T25)	6.0 mm (T25)	6.5 mm (3.5 Hex)	
	309.510		•		•	•		•		•	•	•		•	•	•		•		•	•	•	•		•	
	309.520								•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	309.530											•				•		•	•	•	•	•	•	•	•	•
	309.521								•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•